

ARI product diversity

Control



Control valve
STEVI® Smart
(Series 423/463, 425/426,
440/441, 450/451)



STEVI® Vario
(Series 448/449)



STEVI® Pro
(Series 422/462, 470/471, 472)



Control without auxiliary power
PREDU® / PREDEX® / PRESO® / TEMPTROL®

Isolation



Process valve
ZETRIX®



Butterfly valve
ZIVA®



Bellows sealed valve
FABA® Plus, FABA® Supra I/C



Stop valves with gland seal
STOBU®

Safety



Safety valves (DIN)
SAFE



Safety valves
SAFE TCP



Safety valves (API 526)
ARI-REYCO™



Safety valves (ANSI)
ARI-REYCO™ RL-series

Steam trapping



Steam traps CONA® (mechanical ball float / thermostatic bimetallic and membrane / thermodynamic), monitoring systems
CONA® Control



Manifolds
CODI® for collecting and diverting purpose



Steam trap with multi-valving technology CONA® "All-in-One" (incl. stop valve, inside strainer, back-flow protection, drain valve)




Mechanical pump systems
CONLIFT®, CONA® P

Edition 02/2017 - Data subject to alteration

New: STOBU® for PN 63-160 – now up to DN 100!

STOBU®

The stop valve alternative.
Variable, durable, "Two-in-One"!

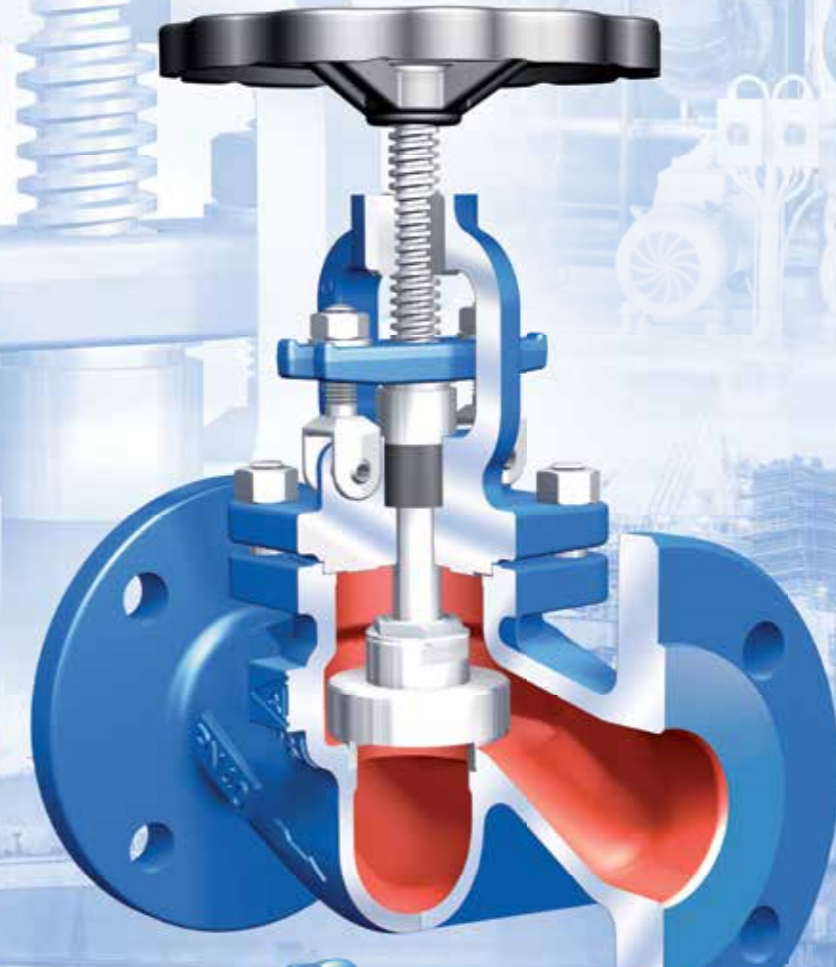

Straight-through,
flanges



Angle pattern,
flanges



Butt weld ends,
with electric
actuator

NEW
from ARI!



Medium pressure,
butt weld ends

NEW
from ARI!



Medium pressure,
flanges, with
pneumatic
actuator

NEW
from ARI!



Medium pressure,
butt weld ends,
with non-rising
handwheel

Profit from diversity made by ARI.
Please don't hesitate to ask for more information!





www.ari-armaturen.com



STOBU®

Reliable and easy to service – For robust isolation in industry, chemicals and shipbuilding

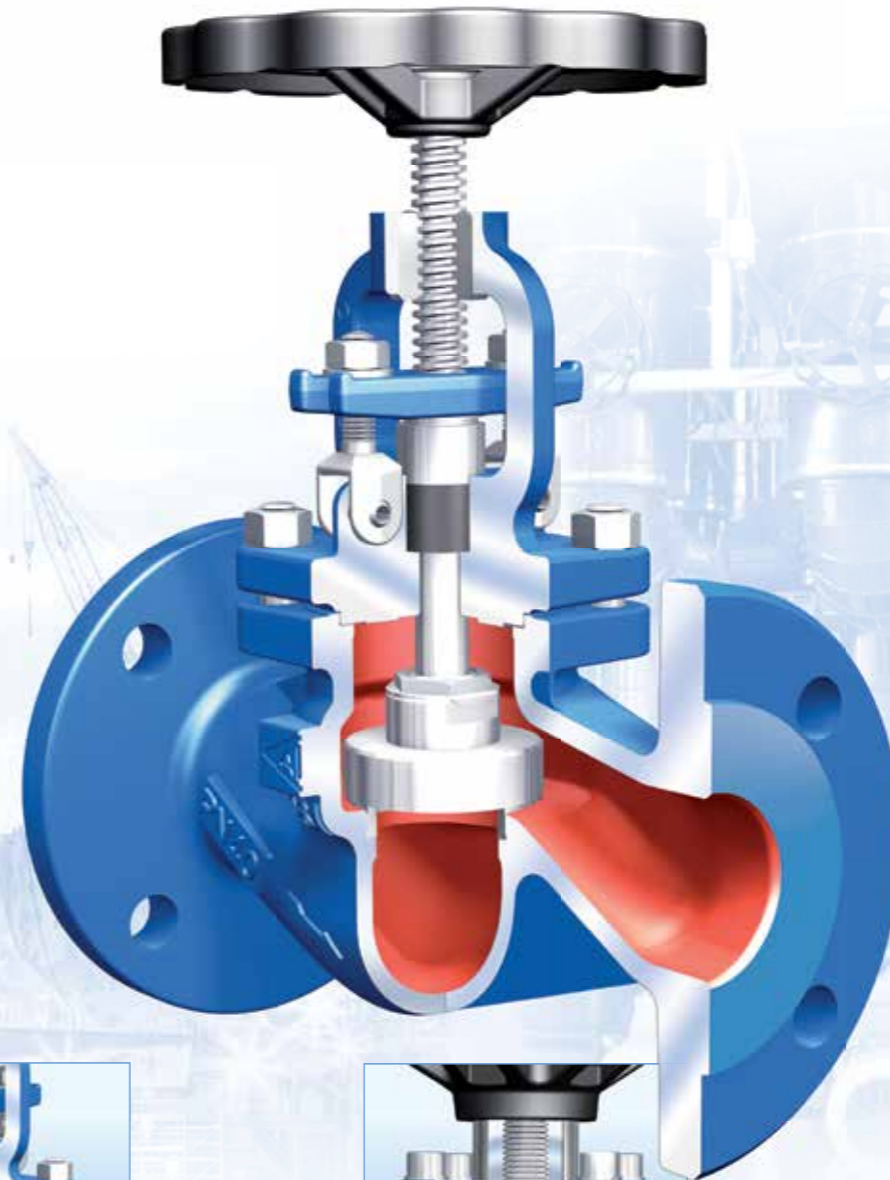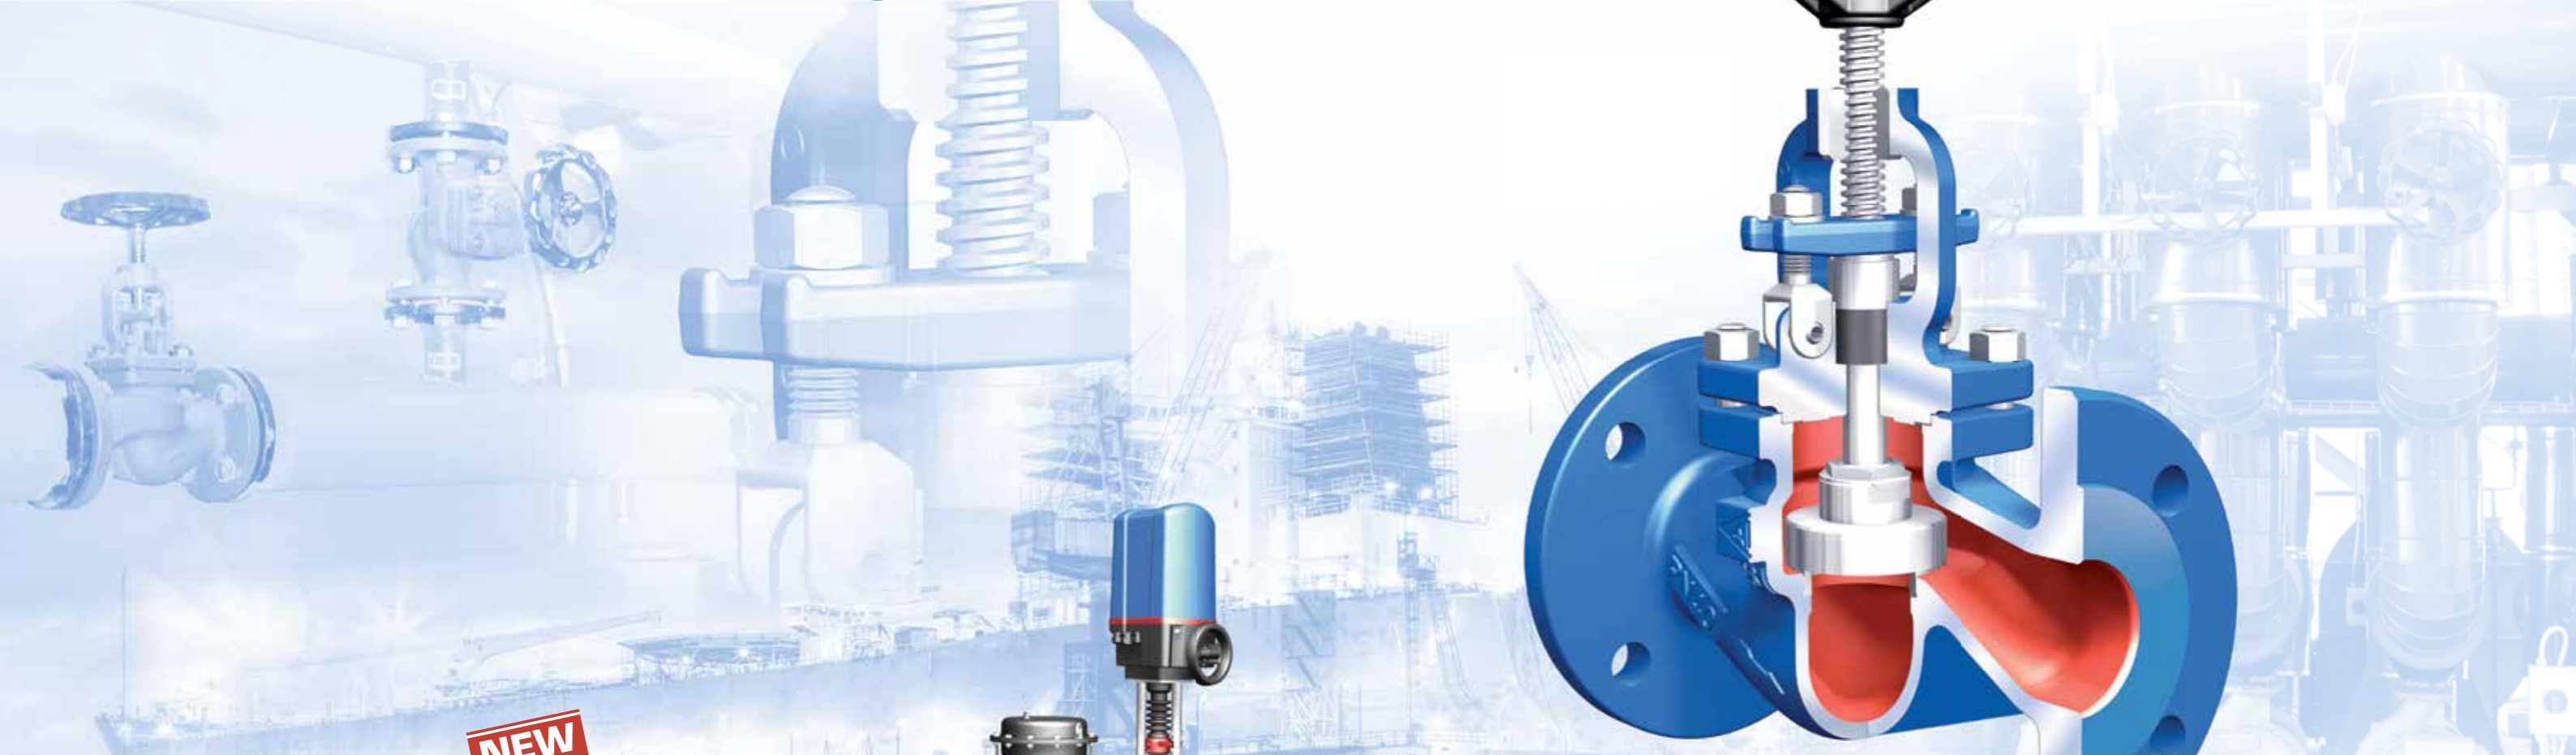

Certified safety: spring loaded stop valve with gland seal acc. to EN ISO 15848-1 / TA-Luft

NEW
from ARI!



Diversity: New – STOBU® for PN 63-160 – now up to DN 100



Diversity: Option of electric or pneumatic actuators



Diversity: e.g. seawater version



Optimal handling: Non-rising handwheel (PN 63-160)



Maximum cost effectiveness: "Two-in-One" (screw-down non-return plug with resetting spring provides additional function as a check valve with shut-off feature)

- Easy to service because the gland packing can be replaced in a few simple steps
- Optimal handling because the gland seal stuffing box allows easy tightening
- Permanently leak-proof due to burnished stem and chambered bonnet seal
- Durable due to bonnet top with threaded bush
- Easy to service due to pivot mounted bolts fixed to the bonnet

- Completely leak-proof due to ideal plug / seat hardness gradient
- Durable due to plug / seat surface with stellite finish
- Two-fold safety due to double sealing mechanism – new: now up to DN 100!
- Optimal handling due to non-rising handwheel
- Certified safety due to spring loaded stop valve with gland seal acc. to EN ISO 15848-1 / TA-Luft

Enormous product diversity provides flexibility in use:

Plug designs: throttling plug, screw-down non-return plug with resetting spring, balancing plug, soft sealing plug

Special designs, e.g. limit switch (mechanical or inductive), chain wheel

Versatile applications, e.g. seawater version acc. to DIN 86251 (seat ring and plug e.g. in CUSN10-CU / stem e.g. in CUSN8)

STOBU® PN 16-40

Nominal diameter: DN 15-500

Materials: Cast iron, SG iron, cast steel, forged steel, SA216 WCB, SA105, stainless steel 1.4408

Flow media: Steam, water

Temperature: -60°C to +450°C

STOBU® PN 63-160

Nominal diameter: DN 10-100 (new: DN 65-100!)

Materials: Cast steel, forged steel, heat resistant steels

Temperature: -10°C to +550°C